


Sheet Gluer

• Safe:	Except for the thickness of material, gear train and rollers are protected.
• Versatile:	Production control is easily maintained due to a variable speed control. The thermostatically-controlled glue tray accommodates cold-water-based adhesives as well as hot animal glues.
• Accurate Coating:	Glue thickness is adjusted by turning the glue control knobs on each side of the gluer to provide an even film of adhesive across the glue roller.
• Adjustability:	Flexible materials up to 1/8" can be coated. With the optional rigid/thick stock attachment up to 5/8" thick can be coated.
• Ease of Maintenance:	Cleaning is a matter of minutes. The tank slides easily out of the machine for quick cleaning.
• Heavy Duty & Reliable:	Designed and ruggedly built for heavy industrial use and trouble-free maintenance.

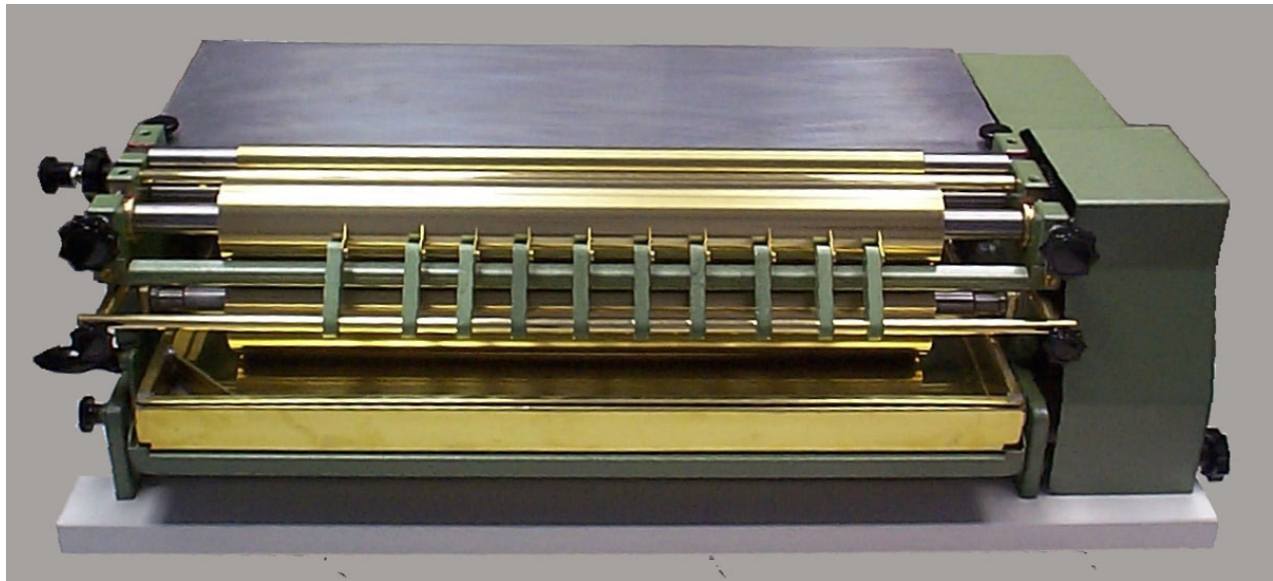

Technical Data

Model	Roller Speed ft./min	Feed Table Depth x Width	Net Weight Lbs.	Glue Capacity Quarts [Liters]	Table Space Requirements	HP 120/220V 1 Phase
20"	65 - 90	10.25" x 26.25"	113	3 [2.8]	14" x 27.5"	1/3
32"	65 - 90	10.25 x 38"	115	5 [4.7]	14" x 38.5"	1/3

Note: Technical data subject to change

MEKATRONICS, INC./BENDROR INTERNATIONAL, LTD.

85 Channel Drive, Port Washington, NY 11050 • Telephone: (516) 883-6805 • FAX: (516) 883-6948