


Topside Gluer

<ul style="list-style-type: none"> • Safe: 	Except for the thickness of material, gear train and rollers are protected.
<ul style="list-style-type: none"> • Versatile: 	This new, variable speed, topside gluer applies water based dextrin or resin adhesive onto nearly any item from paper to boardstock up to ½” [13mm] thick. The convenient glue tank uses an easy to open valve to dispense adhesive onto the roller assembly.
<ul style="list-style-type: none"> • Excellent Glue Film Control: 	Glue control is achieved by adjusting two knobs. A pressure bar attachment helps propel the material through the gluer, assuring an even film of glue or adhesive.
<ul style="list-style-type: none"> • Ease of Maintenance: 	Cleaning is a matter of minutes. The tank slides easily out of the machine for quick cleaning.
<ul style="list-style-type: none"> • Heavy Duty & Reliable: 	Designed and ruggedly built for heavy industrial use and trouble-free maintenance.

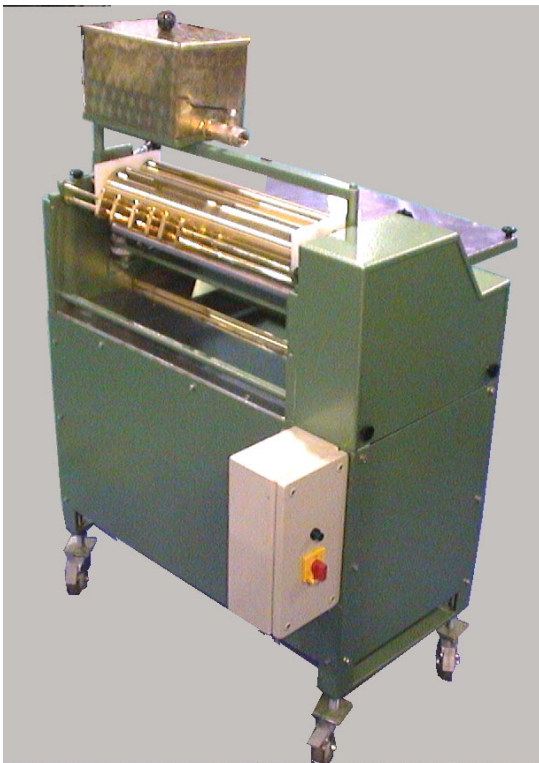

Technical Data

Model	Floor Space Inches [mm]
20" [50]	36 x 36 90 x 90]
32" [82]	36 x 48 [90 x 120]

Power:	0.25 Kw, 120/220V, 1 Ph, All models
---------------	-------------------------------------

Note: Technical data subject to change